

Zehnder Quaro Spa

Hydronic operation

Product data sheet

always the best climate



Distinct shapes; strong, subtle design. The square design of Zehnder Quaro does not intrude but rather complements its surroundings. It is a perfect fit for any modern bathroom. Generous spaces between the tubes are perfect for hanging towels. Timeless design through a geometric shape, which also makes for an impressive room divider. Available in almost any colour and finish from the Zehnder colour chart.


Special benefits for hot water operation

- Flexible installation through right and left connections and 50 mm centre connections


Advantages

- Stylish design through straight-edged clarity
- Generous spaces between the tubes are perfect for hanging towels
- Ample spaces between tubes make cleaning easy
- Discreetly concealed brackets in square design match the radiator
- Special solutions support a wide range of applications, such as room dividers
- Generous spaces between the tubes are perfect for hanging towels
- Brushed stainless steel version ensures resistance to corrosion


Model overview




Front view
QS(C)-075




Front view
QS(C)-120

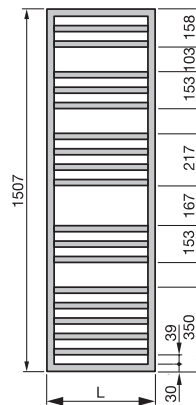

Front view
QS(C)-150

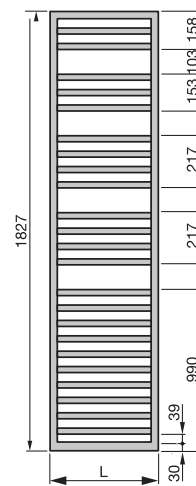

Side view
QS(C)-180

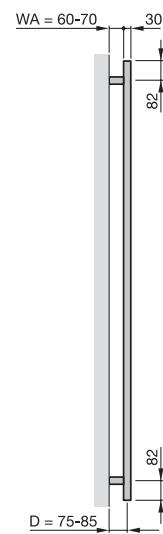

Side view
QS(C)-180

Painted version

Model	H	L	Heat output			
			75/65/20 °C	70/55/24 °C	55/45/24 °C	55/45/20 °C
	mm	mm	Watts	Watts	Watts	Watts
QS-075-045	803	450	206	148	90	108
QS-120-045	1251	450	313	224	136	163
QS-120-055	1251	550	376	270	164	197
QS-150-045	1507	450	371	265	160	192
QS-150-055	1507	550	443	316	191	230
QS-180-055	1827	550	544	389	235	283

H = height, L = length

75/65/20 = Nominal heat output according to EN 442

Chrome-plated version

Model	H	L	Heat output			
			75/65/20 °C	70/55/24 °C	55/45/24 °C	55/45/20 °C
	mm	mm	Watts	Watts	Watts	Watts
QSC-075-045	803	450	206	148	90	108
QSC-120-045	1251	450	313	224	136	163
QSC-120-055	1251	550	376	270	164	197
QSC-150-045	1507	450	371	265	160	192
QSC-150-055	1507	550	443	316	191	230
QSC-180-055	1827	550	544	389	235	283

H = height, L = length

75/65/20 = Nominal heat output according to EN 442